




Product specification

HUGHES 1/2" LLCF 4.3-10 MALE TO 4.3-10 R/A MALE

25-111228D5/XXHE

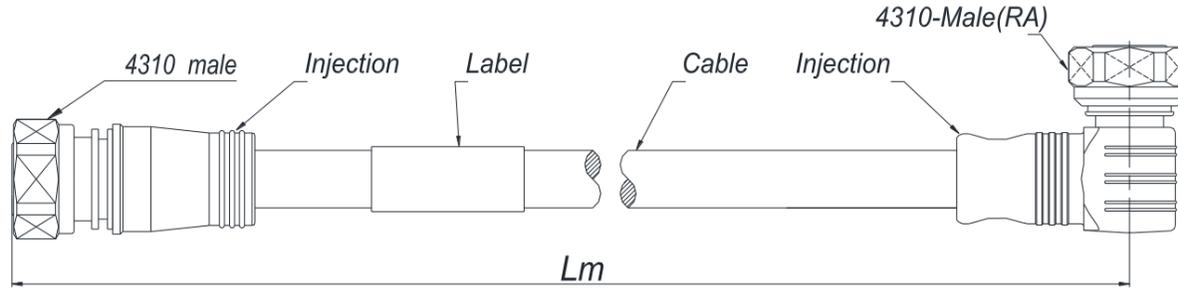

Product Description

Jumper Length	Lm(As Per Customized)	
Cable Type	HUGHES 1/2" LLCF	
Inner Conductor	Copper-Clad Aluminum Wire	
Dielectric	Physical Foam Polyethylene	
Outer Conductor	Corrugated Copper Tube	
Jacket	Black PE	
Connector Type	4.3-10 type male	4.3-10 type right angle male
Inner Conductor Pin	Brass/Silver Plating	Brass/Silver Plating
Body&Outer Conductor	Brass/Trimetal Plating	Brass/Trimetal Plating
Insulator	PTFE	PTFE
Gasket	Silicon Rubber	Silicon Rubber
Nut	Brass/Nickel Plating	Brass/Nickel Plating

Electrical Specifications

Characteristics Impedance	50 Ohm	
Frequency Range	DC~6.0 GHz	
Insulation Resistance	≥5000MΩ	
Dielectric Withstanding Voltage	2500V rms (DC)	
Operating Voltage	1500V	
Insertion Loss	@DC-2.7GHz	≤0.14*L+0.165dB (L=Jumper Length)
	@2.7-4.0GHz	≤0.18*L+0.20dB (L=Jumper Length)
	@4.0-6.0GHz	≤0.23*L+0.25dB (L=Jumper Length)
VSWR	@DC-1.0GHz	≤1.08
	@1.7-3.0GHz	≤1.10
	@3.0-3.6GHz	≤1.15
	@3.6-4.0GHz	≤1.20
	@4.0-5.0GHz	≤1.25
	@5.3-6.0GHz	≤1.25
PIM3(2*43dBm)	@1800MHz	≤-160dBc

Environmental & Mechanical Specifications

Cable Tensile resistance	≥450N
Torque Proof (Nut)	4.3-10 type : 5 N·m
Storage Temperature	-45°C to +65°C
Operating temperature	-45°C to +85°C
Water Proof level	IP68 24hr, 1m, 20
RoHS	Compliant

Regulatory Compliance / Certification

ISO 9001:2015	Compliant
---------------	-----------

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change

Hughes Electronics Ltd
 Unit G, Southwark Business Center,
 Ayres Street, London, SE1 1ES, UK
 Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
 Fax: (44) 020 7378 1434
 email: sales@hugheselectronics.co.uk
 web: www.hugheselectronics.co.uk



Making Good Ideas Happen