




Product specification

X10(NEX10) Male to 4.3-10 Male 1/2" LLCF jumper

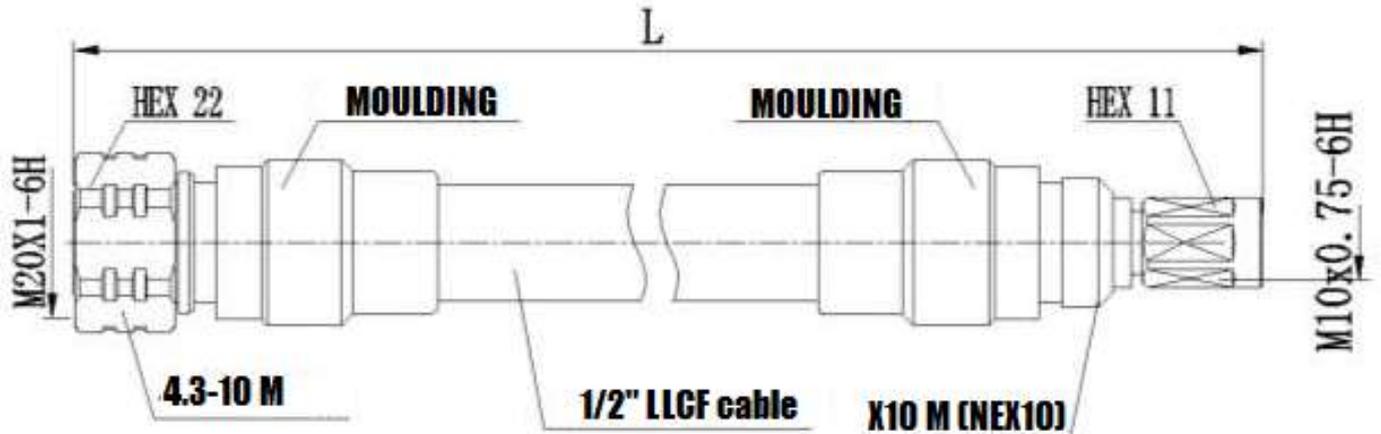

Description

1/2" LLCF Jumper Cable X10(Nex10) Male to 4.3-10 Male

Specification

General		
Cable Type	½" LLCF cable	
Cable Length	L (m)	
Inner Conductor	Copper-Clad Aluminum Wire	
Dielectric	Physical Foam Polyethylene	
Outer Conductor	Corrugated Copper Tube	
Jacket	Black PE	
Connectors	4.3-10	X10(NEX10) Male
Inner Conductor Pin	Brass/Silver Plating	Brass/Silver Plating
Body & Outer Conductor	Brass/Tri-Metal Plating	Brass/Tri-Metal Plating
Insulator	PTFE	PTFE
Electrical		
Characteristics Impedance	50Ω	
Frequency Range	DC~4GHz	
Insulation Resistance	≥5000MΩ	
Dielectric Withstanding Voltage	750V RMS, 50Hz, at sea level	
VSWR	≤1.18	
Maximum Insertion Loss	@ 3GHz ≤ 0.132*L+0.15dB @ 4GHz ≤ 0.155*L+0.20dB	
PIM	≤-160dBc	
Environmental and Mechanical Specifications		
Durability	≥100 cycles	
Temperature Range	-40°C to +85°C	
RoHS	Compliant	
Sealing Class	IP68	

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

Hughes Electronics Ltd
 Unit G, Southwark Business Center,
 Ayres Street, London, SE1 1ES, UK
 Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
 Fax: (44) 020 7378 1434
 email: sales@hugheselectronics.co.uk
 web: www.hugheselectronics.co.uk



Making Good Ideas Happen