



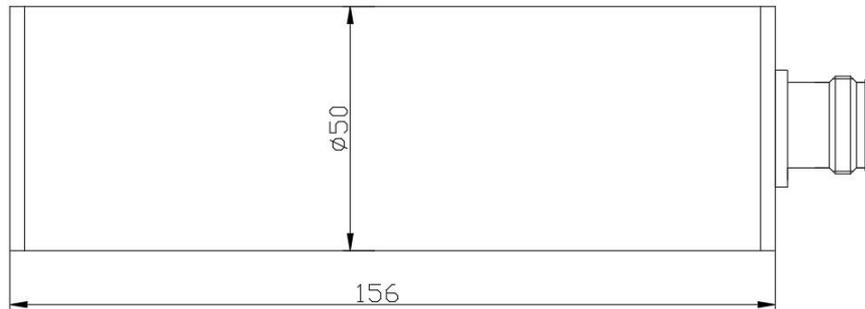

Product specification

50W Low PIM Termination Load

694-4000MHz, -155dBc, 4.3-10 F



Description

Wide frequency band termination load with excellent PIM performance and low VSWR rated IP65. Available with N Type, 7/16DIN or 4.3-10 connectors.

Specification

Freq(MHz)	698-4000MHz
VSWR	≤1.25
PIM(dBc)	-155dBc@2x43dBm
Power Rating(W)	50W (average power per port)
Impedance	50 ohm
Connector	4.3-10 Female
Color	Black-plated
Operating Tem(°C)	-25° C to +50° C
Dimensions(mm)	See mechanical Drawing
Weight(kg)	0.70

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change

Hughes Electronics Ltd
Unit G, Southwark Business Center,
Ayres Street, London, SE1 1ES, UK
Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
Fax: (44) 020 7378 1434
email: sales@hugheselectronics.co.uk
web: www.hugheselectronics.co.uk



Making Good Ideas Happen