

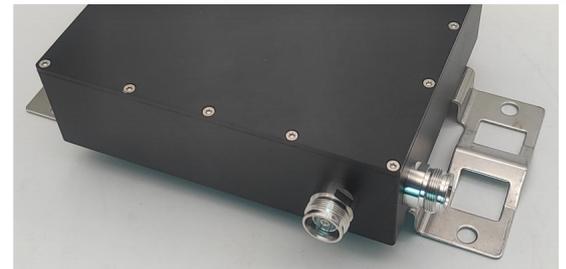


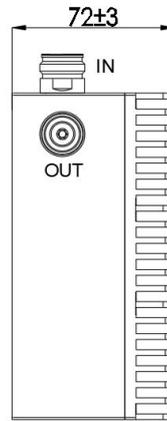

Product specification

100W Low PIM RF Attenuator

698-4000MHz, -155dBc, 4.3-10 F-F

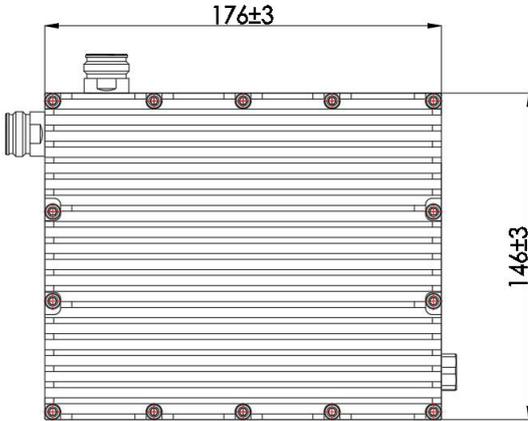

Description

Wide frequency band RF Attenuator with guaranteed PIM compliance and low VSWR. Available with N Type 7/16DIN or 4.3-10 connectors.

Specification

Freq(MHz)	698-4000MHz						
Attenuation(dB)	5	6	8	10	15	20	30
Accuracy(dB)	±0.8	±0.8	±0.8	±1.0	±1.2	±1.2	±1.5
VSWR	≤1.25						
PIM(dBc)	-155dBc@2x43dBm						
Power Rating(W)	100W (average power per port)						
Impedance	50 ohm						
Connector	4.3-10 Female to 4.3-10 Female						
Color	Black-plated						
Operating Tem(°C)	-20° C to +65° C						
Dimensions(mm)	See mechanical Drawing						
Weight(kg)	1.85						

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change

Hughes Electronics Ltd
 Unit G, Southwark Business Center,
 Ayres Street, London, SE1 1ES, UK
 Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
 Fax: (44) 020 7378 1434
 email: sales@hugheselectronics.co.uk
 web: www.hugheselectronics.co.uk



Making Good Ideas Happen