



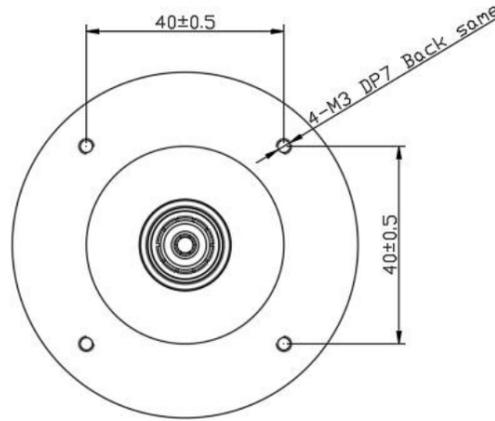

# Product specification

## HUGHES 100W RF ATTENUATOR

### DC-4GHz 4.3-10 MALE TO 4.3-10 FEMALE

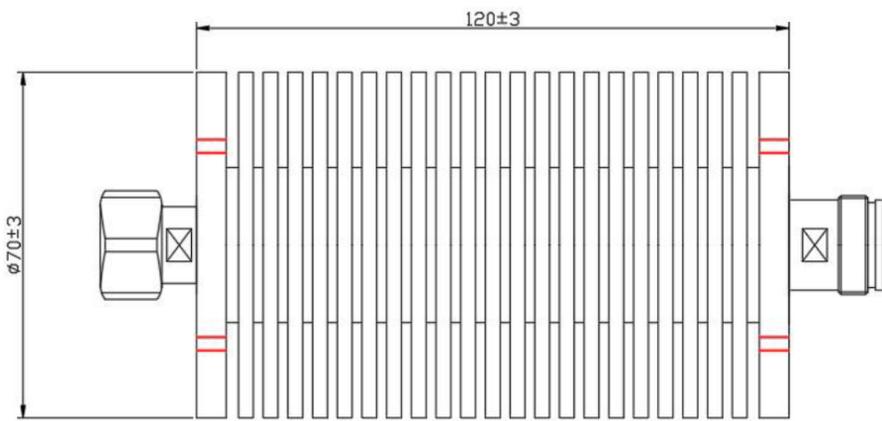

## Description

Hughes 100W RF Attenuator with wide frequency band (DC-4000MHz) and low VSWR. Rated IP60 for indoor use.

## Specification

Attenuation(dB)	3	5	6	7	8	10	13	15	20	30
Accuracy(dB)	±0.5	±0.5	±0.8	±0.8	±0.8	±1.0	±1.0	±1.2	±1.2	±1.5
Freq(MHz)	DC-4GHz									
VSWR	≤1.25	≤1.25	≤1.25	≤1.25	≤1.25	≤1.25	≤1.25	≤1.25	≤1.25	≤1.25
Power Rating(W)	100W (average)									
Impedance	50 ohm									
Connector	4.3-10 Male to 4.3-10 Female									
Color	Black									
Relative Humidity	5-95%									
Operating Tem(°C)	-35° C to +65° C									
Dimensions(mm)	See Mechanical Drawing									
Weight(kg)	0.85									

*The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change*

**Hughes Electronics Ltd**  
 Unit G, Southwark Business Center,  
 Ayres Street, London, SE1 1ES, UK  
 Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400  
 Fax: (44) 020 7378 1434  
 email: sales@hugheselectronics.co.uk  
 web: www.hugheselectronics.co.uk



*Making Good Ideas Happen*