




Product specification

2 Way SMA F Isolated Combiner 4GHz Mountable

35-SMA2W4GHZCO

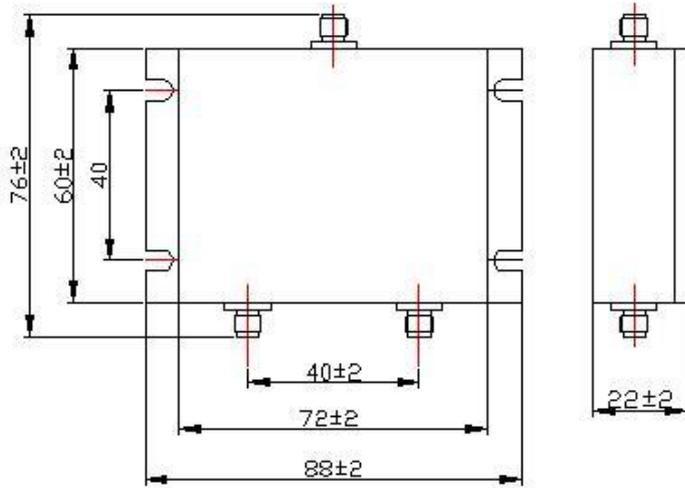

Description

RF Attenuator with wide frequency band (DC-3000MHz) and low VSWR widely used for in-building solutions. Available in several attenuations (xx) and connector interfaces.

Specification

Split Chanel	2 Way
Split Loss(dB)	3.0
Insertion Loss(dB)	≤0.8
Isolation(dB)	≥20
Freq(MHz)	698-4000MHz
VSWR	≤1.30
Power Rating(W)	50W As Splitter, 0.2W As Combiner
Impedance	50 ohm
Connector	SMA Female
Color	Black
Operating Temperature(°C)	-30~+65
Weight(kg)	0.18
Compliance	  

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informative purposes only and are subject to change

Hughes Electronics Ltd
Unit G, Southwark Business Center,
Ayres Street, London, SE1 1ES, UK
Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
Fax: (44) 020 7378 1434
email: sales@hugheselectronics.co.uk
web: www.hugheselectronics.co.uk



Making Good Ideas Happen