




Product specification

LOW PIM 300W DIPLEXER 4.3-10 FEMALE

617-2700MHz / 3300 - 3800MHz

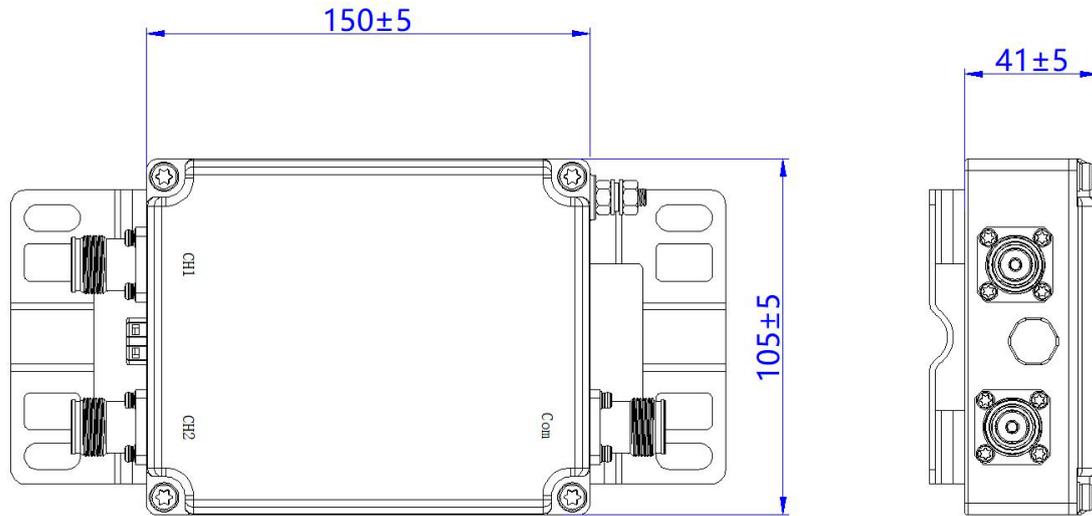

Description

Compact and light-weight, this reliable RF Diplexer is often used in upgrading existing small cells & D-RAN sites. Low PIM guaranteed.

Specification

Electrical Specifications	
Frequency	CH1: 617 to 2700MHz CH2: 3300 to 3800MHz
Return Loss	≥19Db
VSWR	≤1.25
Insertion Loss	≤0.35dB
Isolation	≥50dB
Power	300W (Average)
Intermodulation (3 rd Order)	≤-155dBC@2*43dBm
Impedance	50Ω
Environmental Specifications	
Operating Temperature Range	-20°C to +60°C
Storage Temperature Range	-40°C to +85°C
Relative Humidity	5%-95%
Applications	IP67
Mechanical Specifications	
Connectors type	4.3-10 Female
Colour	Light Grey
Outer Dimension (mm)	See Mechanical Drawing
Packing	1Pcs in box

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.

Hughes Electronics Ltd
Unit G, Southwark Business Center,
Ayres Street, London, SE1 1ES, UK
Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
Fax: (44) 020 7378 1434
email: sales@hugheselectronics.co.uk
web: www.hugheselectronics.co.uk



Making Good Ideas Happen