




Product Specification

7/16 Female to 4.3-10 Female Adaptor

01-6B26C210

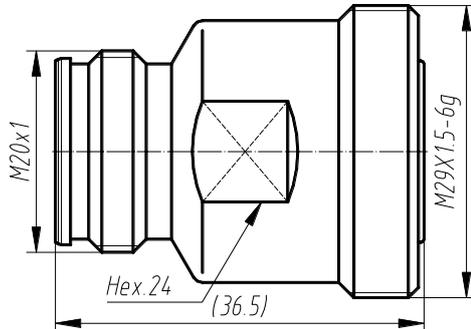

Description

7/16 Straight Female to 4.3-10 Straight Female Adaptor

Material and Plating

Centre Contact	Tin Bronze/Silver Plated
Outer Contact & Body	-
Dielectric	PTFE
Gasket	-

Electrical Characteristics

Characteristics Impedance	50 Ohm	
Frequency Range	DC~7.5GHz	
Insulation Resistance	≥5,000MΩ	
Contract Resistance	7/16 F	4.3-10F
	Centre Contact	≤0.4mΩ
	Outer Contact	≤0.2mΩ
		≤1.5mΩ
		≤1.0.mΩ
Dielectric Withstanding Voltage	2500V rms	
Working Voltage	1000V rms	
Insertion Loss	@DC-3GHz	≤0.10dB
VSWR	@DC-3GHz	≤1.10dB
PIM3 (2*20dBm)	≤-160dBc	

Environmental and Mechanical Specifications

Durability (matings)	≥500 cycles
Thermal Shock Test Method	MIL-STD-202F, Method 107G, Test Condition B
Vibration Test Method	MIL-STD-202, Method 204, Test Condition B
Temperature Range	-65 to +165°C
RoHS	Compliant

Hughes Electronics Ltd
 Unit G, Southwark Business Center,
 Ayres Street, London, SE1 1ES, UK
 Co. No. 2827242 VAT No. 653 5771 17

Tel: (44) 020 7378 1400
 Fax: (44) 020 7378 1434
 email: sales@hugheselectronics.co.uk
 web: www.hugheselectronics.co.uk



Making Good Ideas Happen